


Designed for displaying changeable graphics

www.pizazzsystems.com

Installing A Parts on a wall

- Use your front panel as the template to position panels on walls and align the hole centres.
- Ensure that the fixings you use to secure A Parts are suited to the type of wall they are being attached to e.g. when securing to wood use 8 gauge counter sunk head wood screws. When securing to plaster board, concrete, block etc. obtain wall anchors specifically designed for use with the wall material from your hardware store or specialist supplier.
- Ensure that your A Parts are secured strongly enough to hold the entire loading on the A+B+C Parts as well as the extra•spacers, D Parts if they are used.

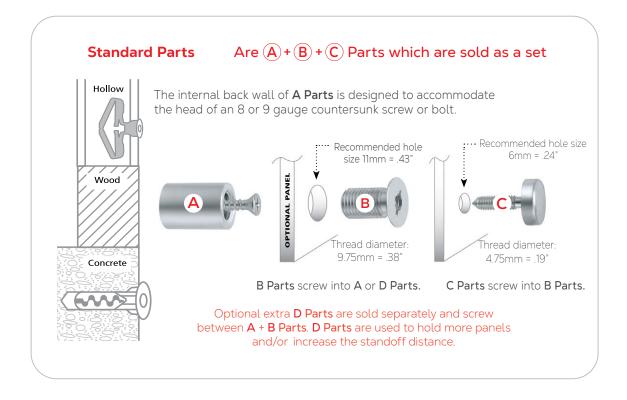




Designed for displaying changeable graphics

www.pizazzsystems.com

Installing A Parts back to back

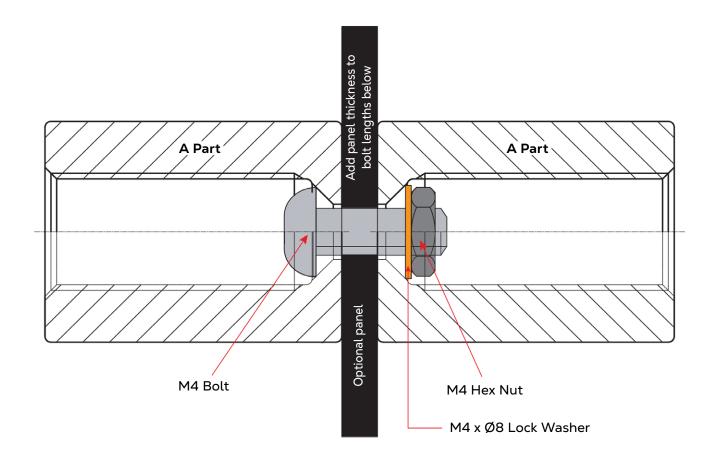


Bolt Dimensions			Recommended Fastening System			The intelligence constitution their discovers
Button Head Bolt Thread Diameter	Thread Length	Overa ll Length	4	is the property of Pizazz Gro	The intellectual property in this drawing is the property of Pizazz Group Limited, Auckland, New Zealand.	
M4	7mm	10mm				Copyright © Pizazz Group Limited 2021.
.156″	.281"	.375″	M4 Bolt	M4 x Ø11 M4 x Ø	8 M4	Unauthorised use prohibited.
Add panel thickness to bolt lengths above				Washer Lock Wa	sher Hex Nut	



Designed for displaying changeable graphics

www.pizazzsystems.com

Installing an A Part on a panel

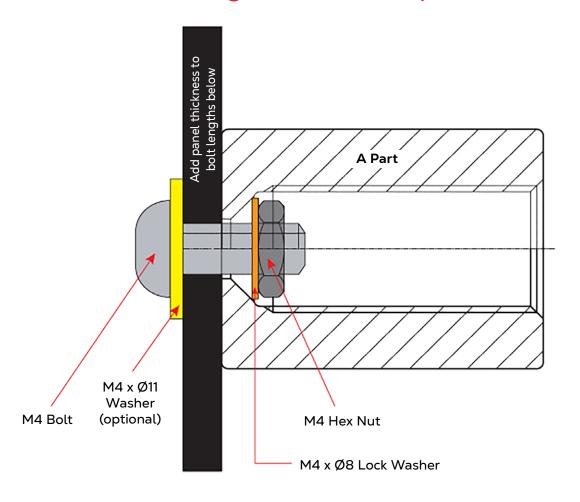

Bolt Dimensions	Recommended Fastening System			The distant section of the section o	
Button Head Bolt Thread Thread Diameter Length	Overa ll Length	4		M4	The intellectual property in this drawing is the property of Pizazz Group Limited, Auckland, New Zealand. Copyright © Pizazz Group Limited 2021. Unauthorised use prohibited.
M4 7mm	10mm	M4 Bolt			
.156" .281"	.375"		M4 x Ø11 M4 x Ø8		
Add panel thickness to bolt		Washer Lock Washer	r Hex Nut	oridatiforised use profiloted.	