

pizazz

mono·mount®

www.pizazzsystems.com





Panel Capacities


Hybrid Collection

Sizes and dimensions

D Parts are also available for all sizes in this range.

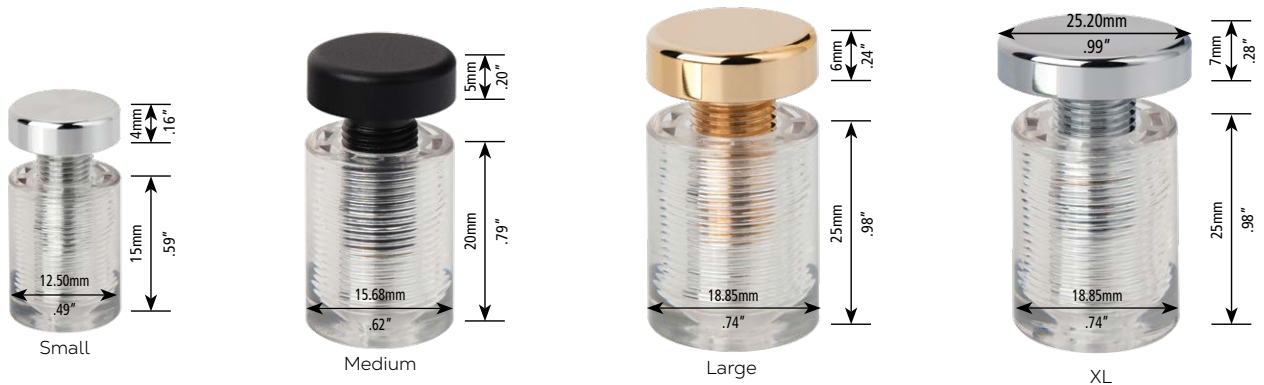

The internal back wall of **A Parts** are designed to accommodate the head of an 8 or 9 gauge countersunk screw or bolt.

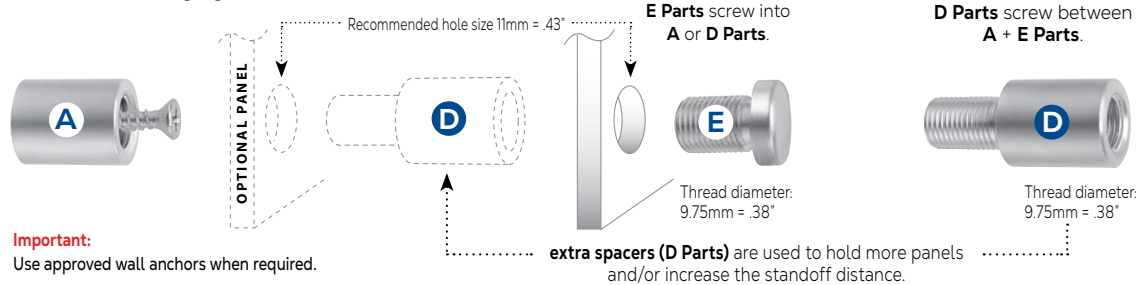

Important:
Use approved wall anchors when required.

extra spacers (D Parts) are used to hold more panels and/or increase the standoff distance.

A+E Parts

Maximum part capacities E Parts

Optional extra spacers D Parts

| | Metric | | Imperial | |
|---------------------|--------|--|----------|--|
| Small | | | | |
| Max load per part | 6 kgs | | 13.2 lbs | |
| Max panel weight | 12 kgs | | 26.4 lbs | |
| Max panel thickness | 4mm | | .16" | |
| Medium | | | | |
| Max load per part | 8 kgs | | 17.6 lbs | |
| Max panel weight | 16 kgs | | 35.2 lbs | |
| Max panel thickness | 8mm | | .31" | |
| Large | | | | |
| Max load per part | 10 kgs | | 22 lbs | |
| Max panel weight | 20 kgs | | 44 lbs | |
| Max panel thickness | 12mm | | .47" | |
| XL | | | | |
| Max load per part | 12 kgs | | 26.4 lbs | |
| Max panel weight | 24 kgs | | 52.8 lbs | |
| Max panel thickness | 16mm | | .63" | |

IMPORTANT

- Maximum load per monomount should not exceed the maximum load per E Part.
- Maximum total load should not exceed the maximum panel weight.
- Maximum panel weight is fixed and does not increase with extra monomounts.

Installers must ensure that:

- Any of the limits detailed above are not exceeded.
- A Parts are securely fixed using screws or bolts that are strong enough to support the total load.
- When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.