

pizazz[®] multi•mount

www.pizazzsystems.com





Panel Capacities

Hybrid Collection

Sizes and dimensions

D Parts are also available for all sizes in this range.

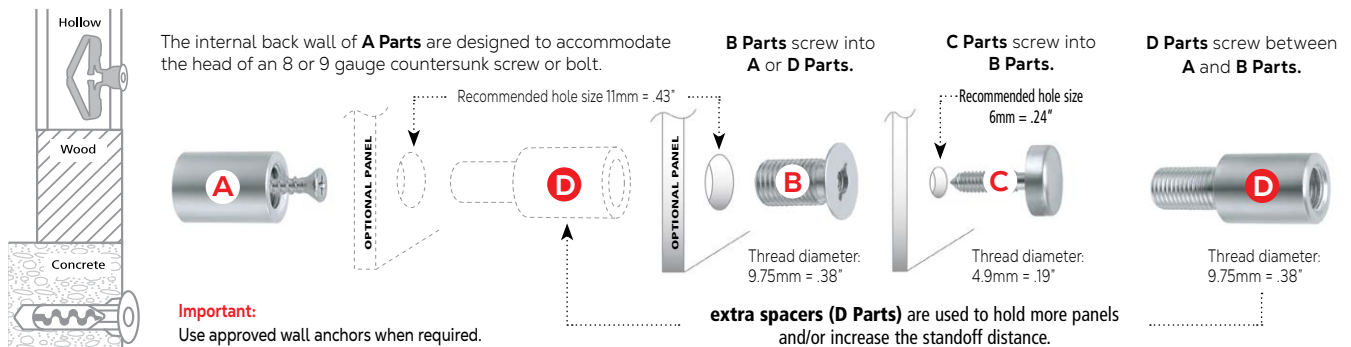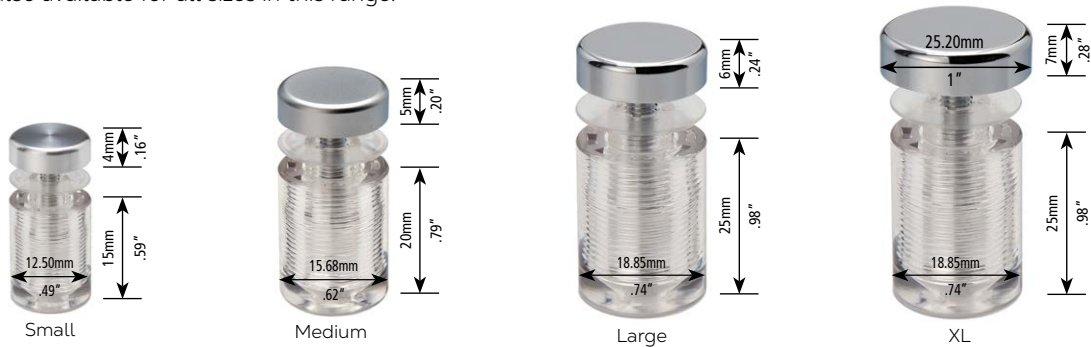

A+B+C Parts	Maximum capacities B Parts		Maximum capacities C Parts		Optional extra spacers D Parts	
Small	Metric	Imperial	Metric	Imperial	Metric	Imperial
Max load per part	6 kgs	13.2 lbs	6 kgs	13.2 lbs	6 kgs	13.2 lbs
Max panel weight	12 kgs	26.4 lbs	12 kgs	26.4 lbs	12 kgs	26.4 lbs
Max panel thickness	4mm	.16"	4mm	.16"	4mm	.16"
Medium	Metric	Imperial	Metric	Imperial	Metric	Imperial
Max load per part	8 kgs	17.6 lbs	8 kgs	17.6 lbs	8 kgs	17.6 lbs
Max panel weight	16 kgs	35.2 lbs	16 kgs	35.2 lbs	16 kgs	35.2 lbs
Max panel thickness	8mm	.31"	8mm	.31"	8mm	.31"
Large	Metric	Imperial	Metric	Imperial	Metric	Imperial
Max load per part	10 kgs	22 lbs	10 kgs	22 lbs	10 kgs	22 lbs
Max panel weight	20 kgs	44 lbs	20 kgs	44 lbs	20 kgs	44 lbs
Max panel thickness	12mm	.47"	10mm	.39"	12mm	.47"
XL	Metric	Imperial	Metric	Imperial	Metric	Imperial
Max load per part	10 kgs	22 lbs	10 kgs	22 lbs	10 kgs	22 lbs
Max panel weight	20 kgs	44 lbs	20 kgs	44 lbs	20 kgs	44 lbs
Max panel thickness	16mm	.63"	12mm	.47"	16mm	.63"

IMPORTANT

- Maximum load per multimount should not exceed the maximum load per B Part.
- Maximum total load should not exceed the maximum panel weight in the B Parts column.
- Maximum panel weight is fixed and does not increase with extra multimounts.

Installers must ensure that:

- Any of the limits detailed above are not exceeded.
- A Parts are securely fixed using screws or bolts that are strong enough to support the total load.
- When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.